

LED 5 INCH REGRESS LUMINAIRE HIGH OUTPUT



ITEM	G-20216
DESCRIPTION	R5/23W/R/LED/3CCT
COLOR TEMPERATURE	30, 41, 50k
OUTPUT LUMEN	2000
BEAM ANGLE	60°
INPUT VOLTS	120V
WATTAGE	23w
EQUIV. WATTAGE	200W
CRI	>90
DIMMABLE	Yes
CUTOUT	5.00
OD	5.75
HEIGHT	3.35
mA	500mA
OUTPUT VOLTAGE	38v

ITEM	G-20218
DESCRIPTION	R5/23W/SQ/LED/3CCT
COLOR TEMPERATURE	30, 41, 50k
OUTPUT LUMEN	2000
BEAM ANGLE	60°
INPUT VOLTS	120V
WATTAGE	23w
EQUIV. WATTAGE	200W
CRI	>90
DIMMABLE	Yes
CUTOUT	5.00
OD	5.75
HEIGHT	3.35
mA	500mA
OUTPUT VOLTAGE	38v



- WARM WHITE 3000K
- COOL WHITE 4100K
- SUPER WHITE 5000K



Pack:18


- 3.35 inch Ceiling Space Required
- 50,000 Hours Rated Average Life
- New Construction or Remodel
- 90+ CRI Models Provide Superior Color

Dimmable:
5%

Lifetime:
50,000 hours

Warranty:
3 years



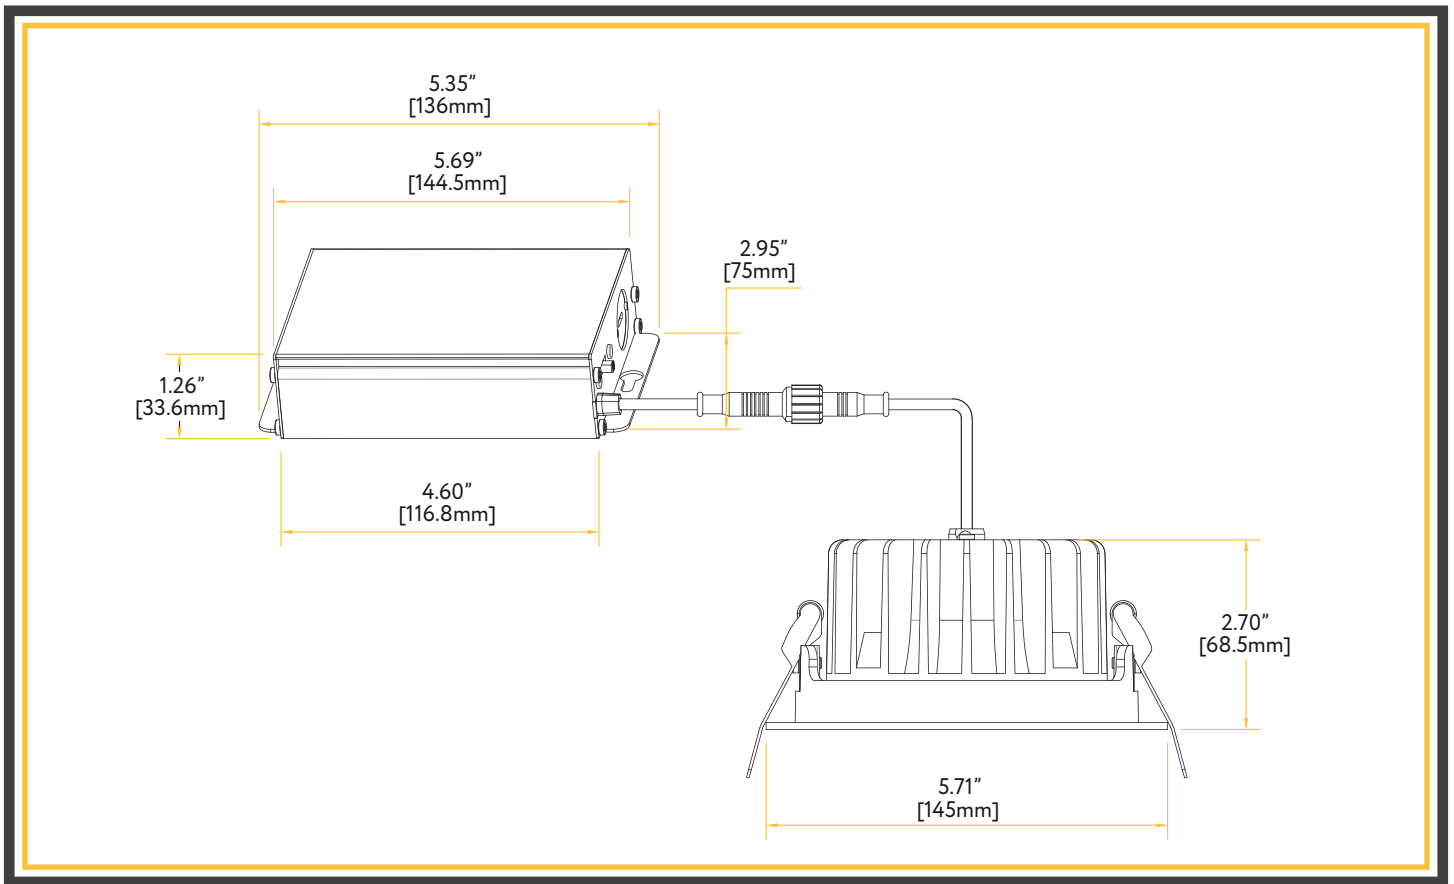

Dimmer List

BRAND	SERIES	MODEL	LOAD	BRAND	SERIES	MODEL	LOAD
LUTRON	SKYLARK CONTOUR	LECL-153P	150W	LUTRON	TOGGLER	TGCL-153P	150W
		CTCL-150H	150W		ARIADNI	AYCL-153P	150W
		LGCL-153PLH	150W		MAESTRO	MACL-153M	600W
		CTCL-153P	150W	LEVITON	ILLUMATECH	IPL06	150W
		SCL-153P	150W		SURESLIDE	6672	150W
		S-600P	600W		6674	150W	
	CASETA	PD-6WCL	150W	EATON	SMART DIMMER	AAL06	300W
		PD-5NE	150W	PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
		PD-10NXD	250W	GE	ROCKER	10464	150W
	DIVA	DVCL-153P	150W		TOGGLE	18027	150W

Accessories

Emergency LED Driver

15W G-48410 30W G-48411



New Construction Plate

ITEM G-19981 (3 Punch Outs)



120-277V Driver

ITEM G-48304 0-10 Dimming



Extension Cords

G-20247 5ft G-20248 10ft

