




Emergency LED Driver 15W & 30W For Isolated & Non Isolated Drivers



New Product

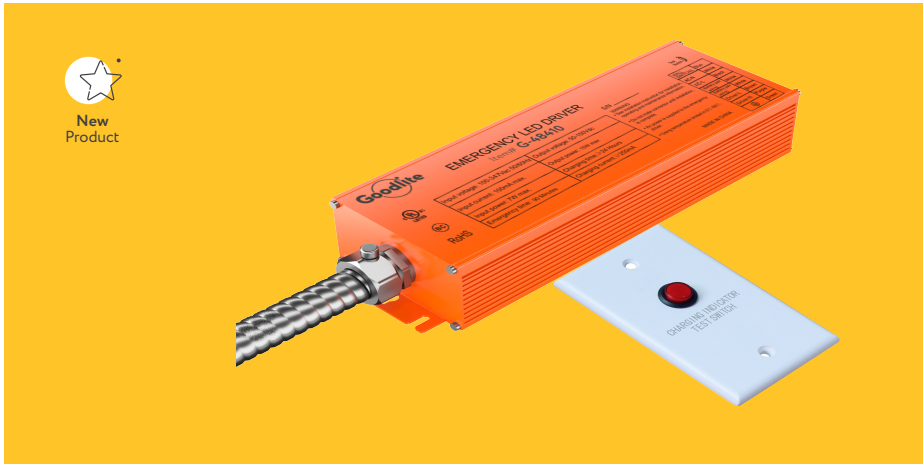

Dimmable: 10%


- Listed for field installation-UL924 and CSA C22.2 NO.141
- Universal input 100-347Vac

LIMITLESS OPTIONS FOR THE FOLLOWING APPLICATIONS
COMPATIBLE WITH


- T8 Lamps
- Slim Wafer
- Retrofits
- Downlight
- LED Bulbs
- Steplight

ITEM	DESCRIPTION	OUTPUT MAX MILLIAMPS	OUTPUT VOLTAGE	OUTPUT WATTAGE	ILLUMINATION TIME	INPUT VOLTAGE	CHARGING CURRENT	RECHARGING TIME	PACKAGE (INNER/ MASTER)
G-48410	EM/15W/14.8Vdc/2000mA	2000mA	50-150Vdc	15W	90 Minutes	120/347v	250mA	24 Hours	15
G-48411	EM/30W/29.6Vdc/3000mA	3000mA	50-150Vdc	30W	90 Minutes	120/347v	250mA	24 Hours	15

Wiring Diagram:

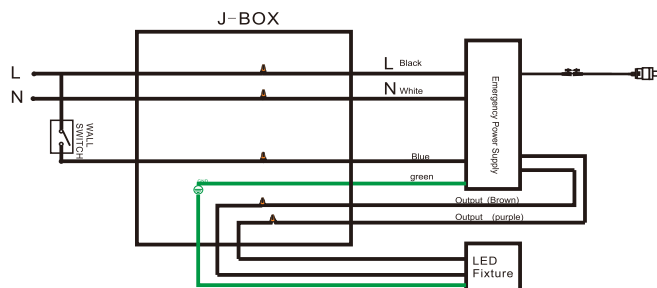

Dimensions:

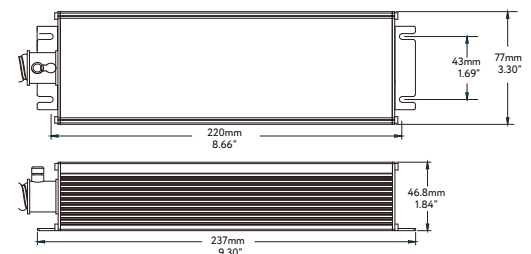

1. DO NOT MATE CONNECTOR UNTIL INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED.

2. TEST ACCESSORY LEADS-OBSERVE PROPER POLARITY WIRING.